



# SS013S Negative Ion Driver 115 VAC

# SS014S Negative Ion Driver 220 VAC

Float the black wire or attach to optional dust collection plate.  
**CAUTION!!** This lead is at an AC potential and must not be earth grounded. May be a shock hazard if exposed to touch or contact.

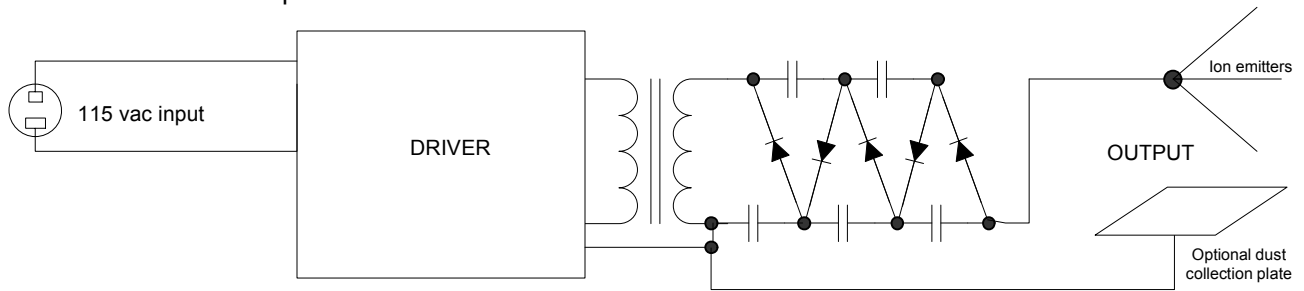

Schematic

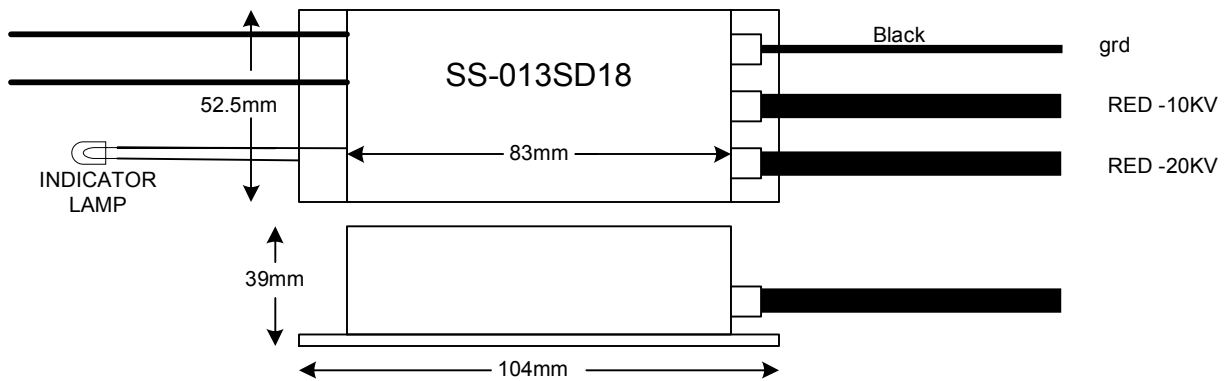

Function	Value	Tolerance	Other
Input Voltage	220vac		
Input Current (No load)	110 ma		
Input Current (load)	200 ma		
Input Watt (No load)			
Input Watt (load)			
Output Volts	-20 kvdc		
Output Configuration	Unbalanced with ac ground		Do not ground
Internal Operating Frequency	48 khz		

*Always check entire system for any excessive heating*

Information Unlimited PO 716 Amherst, N.H. 03031  
 Tel#1 603 673 6493 Fax#1 603 672 5406  
 Email <bob@amazing1.com>  
 Web <www.amazing1.com>  
 Copywritred 3/01