

## Duty Cycle Writeup 2011

Our duty cycle controlled power used in many of our projects has many advantages. When power is controlled by a variac or other voltage reducing mechanisms output to the load decreases by ohms law where  $P = EI$  and the load sees a reduced voltage to control power. Both voltage and amps are simultaneously decreased as they are dependent functions on one another. An example is in attempting to dim a gas discharge tube such as a piece of neon or fluorescent tubing. As the voltage is decreased the tube dims to a point where now the gas discharge pulls from the ends, or extinguishes. Loads such as HHO reaction cells, corona or ozone production, paint spraying, flocking, or other chemical reactions suffer simultaneous voltage and current changing as dictated by the load resistance.


Duty cycled controlled power utilizes the time domain of the voltage. The waveform sketches show various ratios of the voltage wave form over a 1 second period. The sketch at A shows 10 volts at 100% "time on". The power produced in a 5 ohm resistor is simply volt squared divided by load resistance, in this case  $10^2/5=20$  watts. Sketch B shows a 50% "time on". Power now is 5 watts...WRONG! For the 1 second period the voltage is discontinuous. It is 10 volts for half the 1 sec period and zero for the other half. The load sees full voltage and full current therefore full power of 20 watt for  $\frac{1}{2}$  sec. The energy for the one sec period is 10 joules. As the time "on" decreases the load still sees full power for the "on" interval but now proportionately less energy in joules.

A plasma such as ionized neon gas in a long glass tube clearly shows this neat effect. The display can be reduced to a snake like thin line of energized plasma. The plasma would not pull from the ends of the discharge tube but would be obviously very dim. This is the result of very short full voltage pulses at corresponding current but much less joulean energy as  $\text{energy} = \int v_i(t)$

The load now if a gas discharge tube, solid state Tesla coil, HHO gas generator or those mentioned above will now maintain the operational benefit of full voltage intervals but greatly reduced energy due to the shorter time "on".

If you dimmed the same tube by reducing the entire voltage time domain you would get dimming with display pulling away from the end electrodes and becoming very inhomogeneous. Other devices would function very erratically due the lack of voltage during the "on" time of the period.

To summarize you can control the power to a device by control of the current without reduction of the applied voltage. The device operates at normal voltage and current for a variable domain in time.

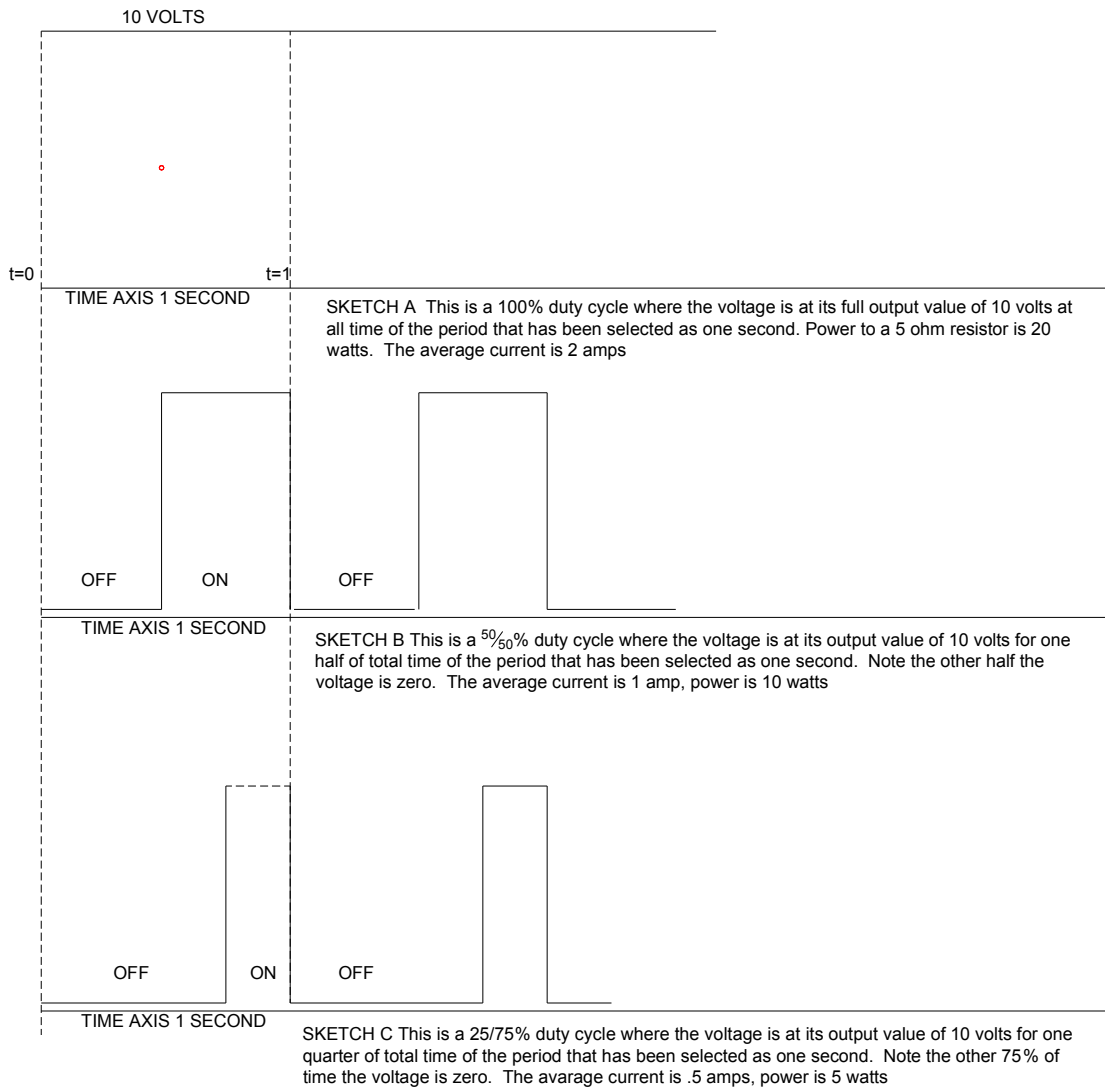

Information Unlimited PO Box 716  
 Amherst N.H. 03031 U.S.A.  
 Web<[www.amazing1.com](http://www.amazing1.com)>  
 E-mail<[riannini@amazing1.com](mailto:riannini@amazing1.com)>  
 603 673 4730 Fax 603 672 5406