



MINIMAX4/NEONX8 INSTRUCTIONS

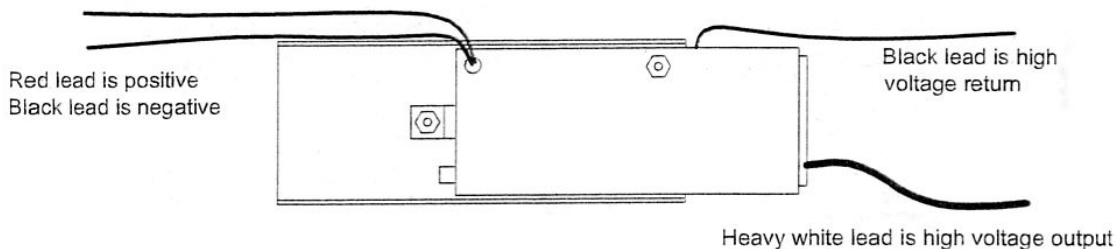

This universal high voltage power supply was originally designed for neon displays in our laboratories. It is UL approved and virtually indestructible. It is open circuit and short circuit protected. Open circuit output voltage is over 4000 at a frequency of 30 KHz. Short circuit current is >15 ma. Unit load lines at 3000 vac delivering 10 ma. with 12 vdc input. Applications include powering gas discharge tubes up to eight feet, plasma generation for burning and etching, output is easily converted to high voltage dc up to 25 kv and can be used for capacitor charging and a host of high voltage experiments. Always allow to operate for an hour or so and check for heat. Unit never should be uncomfortably hot to touch.

Use a 12 volt 1 amp dc adapter for full output or a 12 volt .5 amp for 1/2 output. You may use a 12 volt 1.5 amp for increased output intermittently for experimental and laboratory use.

Optional high voltage dc multiplier circuits easily used with this power supply

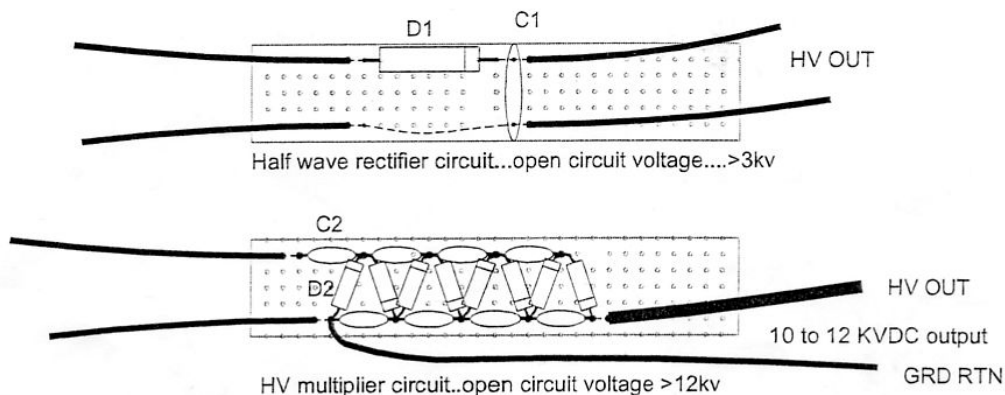

Parts available through information <www.amazing1.com>

WR1 24" #20 Hook up wire
PB1 1 X 4" .1 Grid perfboard
Note 4 stages shown can produce 10 to12 KV!!

C1 .01mfd 2kv disk capacitor.....#.01M2KV
D1 6KV .1 usec diode.....#VG6
C2 270 pfd 3kv disk capacitors...#270 /3KV

SPECIAL NOTE

If you use this unit to power a piece of neon under 6 feet it will be necessary to pit a 50 pfd 6kv capacitor in serie and located adjacent to the return electrode of the display

Information Unlimited PO Box 716
Amherst N.H. 03031 U.S.A.
Web<www.amazing1.com>
E-mail<bob@amazing1.com>
603 673 4730 Fax 603 672 5406